

BAL1400ACTD Florescent Emergency Ballast 1400 Lumens



Project:	
Type:	
Catalog #:	



LED Test switch included.

ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one or two lamps in the emergency mode for a minimum of 90 minutes.
- Provides a maximum initial lumen output of 1400 lumens.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long-life, maintenance-free, rechargeable Sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp(s) for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.
- Time delay enhancement to overcome end-of-life circuit protection.

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL listed for factory or field installation.

HOUSING


- Durable painted steel construction in white finish.
- Compact design fits most fluorescent fixtures.

WARRANTY/LISTING


- Five year warranty against defects in material and workmanship. (Lamps excluded)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations.

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates two 8W-28W T5, one 8W-54W T5/T5HO, two 17W-40W, one 17W-215W T8 through T12, two 13W-39W, one 13W-42W 4-pin compact, two 18W-36W or one 18W-50W 50W 4-pin long compact fluorescent lamps.

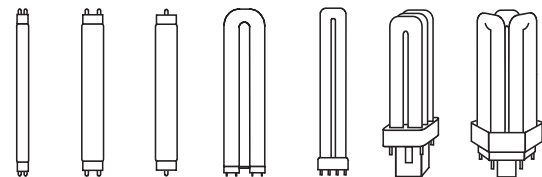

DIMENSIONS

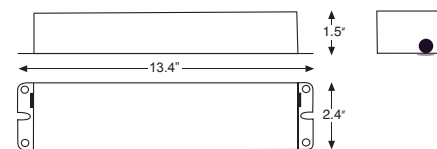

Lamp	Initial Lumens	
	1-lamp	2-lamp
T5 14W	1100	1200
T5 21W	1150	1250
T5 28W	1250	1300
T5HO 39W	1300	-
T5HO 54W	1350	-
T8 17W	1050	1200
T8 32W	1350	1400
T12 20W	700	800
T12 40W	850	900
T8 59W	1350	-
T12 110W	1350	-
T12 215W	1400	-

Lamp	Initial Lumens	
	1-lamp	2-lamp
4-pin PL CF 13W	825	900
4-pin PL CF 18W	975	1100
4-pin PL CF 26W	1000	1100
4-pin PL CF 32W	1050	1150
4-pin PL CF 42W	1150	-
4-pin Long CF 18W	900	1050
4-pin Long CF 24W	1100	1150
4-pin Long CF 36W	1200	1250
4-pin Long CF 40W	1250	-
4-pin Long CF 50W	1250	-

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

BAL1400ACTD Florescent Emergency Ballast 1400 Lumens



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
BAL1400ACTD	3.3	3.3	0.270	0.270