

|                   |  |
|-------------------|--|
| <b>Project:</b>   |  |
| <b>Type:</b>      |  |
| <b>Catalog #:</b> |  |



## STANDARD



## OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## HOUSING

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

## DIMENSIONS

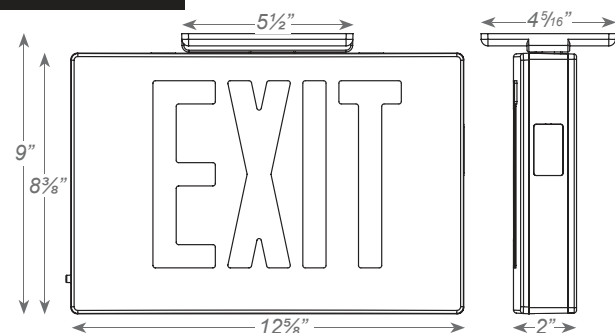

## ORDERING INFORMATION

Sample Part Number: **KXTEU1RBAEM**

| MODEL | No. of FACES | LETTER COLOR                 | HOUSING COLOR | FACE PANEL | BATTERY           | OPTIONS                                 |
|-------|--------------|------------------------------|---------------|------------|-------------------|---|
| KXTEU | 1            | Single Face                  | R Red         | W White    | (blank) AC-Only   | SDT Self-Diagnostics <sup>1</sup>       |
|       | 2            | Double Face                  | G Green       | B Black    | EM Battery Backup | 2C Dual Circuit Operation <sup>2</sup>  |
|       | 3            | Universal Single/Double Face |               | A Aluminum |                   | TP Tamper-Proof<br>USA Assembled In USA |

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.

|                   |  |
|-------------------|--|
| <b>Project:</b>   |  |
| <b>Type:</b>      |  |
| <b>Catalog #:</b> |  |

## ELECTRICAL INFORMATION

| CATALOG NUMBER        | INPUT WATTS (W) |      | INPUT AMPS (A) |       |
|-----------------------|-----------------|------|----------------|-------|
|                       | 120V            | 277V | 120V           | 277V  |
| KXTEU-RED/EM/2C/SDT   | 3.2             | 3.6  | 0.031          | 0.019 |
| KXTEU-GREEN/EM/2C/SDT | 3.8             | 4.4  | 0.033          | 0.017 |