

OWLEM LED Wet Location Emergency Thermoplastic Unit



Project:	
Type:	
Catalog #:	

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED lamps.
- Two fully adjustable semi-recessed, round lamp heads for optimal light distribution.
- Provides up to 20-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- 1.2 watt (12 LEDs x 0.10 watts) per head.

ELECTRICAL

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, OFF-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V 700mAH long-life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back plate for surface mount.
- Suitable for wall or ceiling mount.
- Spacing: 17-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.

WARRANTY / LISTING

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C – 40°C).

DIMENSIONS

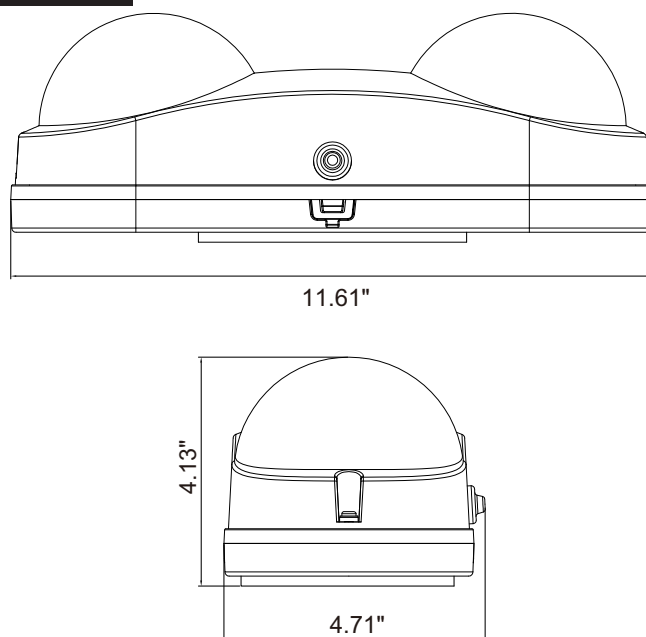

ORDERING INFORMATION

Sample Part Number: **OWLEMW**

MODEL	HOUSING COLOR	
OWLEM	W	White

OWLEM LED Wet Location Emergency Thermoplastic Unit



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

MODEL	INPUT VOLTAGE (V)	INPUT CURRENT (A)	INPUT POWER (W)
OWLEM	120/277	0.017	1.6