

DXR Remote Capable Incandescent Emergency Unit



Project:	
Type:	
Catalog #:	

STANDARD | OPTIONAL



ILLUMINATION

- Adjustable, glare-free PAR-Type lamp heads.
- 6V model offers 7.2W lamps, standard.
- 12V 50W model offers 9W lamps, standard.
12V 100W model offers 12W lamps, standard.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact thermoplastic construction.


OPTIONS

- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY/LISTING

- Five Year Warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for dry locations. (25°C)

DIMENSIONS

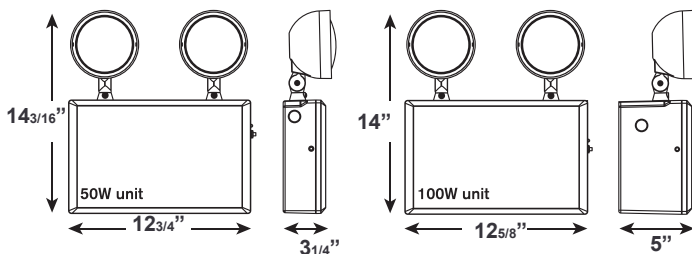

ORDERING INFORMATION

Sample Part Number: **DXR-12-10**

Special Voltage options available.
Check with your Best Lighting representative.

Model	Voltage	Capacity	Options
DXR	6 6 Volts	5 50 Watt	HTR Internal Heater (Available with 50W units only)
	12 12 Volts	10 100 Watt	20SB 12V20W Sealed Beam Halogen (Available with 12V units only)
			USA Assembled in the USA

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
DXR-65	15.1	17.7	0.142	0.068
DXR-610	20.5	21.1	0.189	0.089
DXR-125	19.6	23.4	0.178	0.093
DXR-1210	29.3	33.5	0.273	0.131

CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.

REMOTE LAMP COMPATIBILITY

6 VOLT

Catalog Number:	Maximum Remote Capacity Available
DXR650	35.6 watts
DXR610	85.6 watts

12 VOLT

Catalog Number:	Maximum Remote Capacity Available
DXR125	32 watts
DXR1210	76 watts
DXR12520SB	10 watts
DXR121020SB	60 watts

6 VOLT

Remote Head Family	Wattage
RHR-1-6V5.4W	5.4
RHR-2-6V5.4W	10.8
RHR-1-6V7.2W	7.2
RHR-2-6V7.2W	14.4
RHR-1-6V9W	9
RHR-2-6V9W	18
RH1-6V5.4W	5.4
RH2-6V5.4W	10.8
RH1-6V7.2W	7.2
RH2-6V7.2W	14.4
RH1-6V9W	9
RH2-6V9W	18
RH1-WP-6V5.4W	5.4
RH2-WP-6.5.4W	10.8
RH1-WP-6V7.2W	7.2
RH2-WP-6V7.2W	14.4
RH1-WP-6V9W	9
RH2-WP-6V9W	18

12 VOLT

Remote Head Family	Wattage
RHR-1-12V7W	7
RHR-2-12V7W	14
RHR-1-12V9W	9
RHR-2-12V9W	18
RHR-1-12V12W	12
RHR-2-12V12W	24
RH1-12V7W	7
RH2-12V7W	14
RH1-12V9W	9
RH2-12V9W	18
RH1-12V12W	12
RH2-12V12W	24
RH1-WP-12V7W	7
RH2-WP-12V7W	14
RH1-WP-12V9W	9
RH2-WP-12V9W	18
RH1-WP-12V12W	12
RH2-WP-12V12W	24

Model #	Watts for 1-1/2 hrs.	Voltage	Total Connected Heads/Fixtures		
			4 hrs.	2 hrs.	1.5 hrs.
DXR-65	50	6	2*	4*	6*
DXR-610	100	6	4*	9*	12*
DXR-125	50	12	2**	3**	5**
DXR-1210	100	12	4**	7**	10**

**Based on 7.2 watt lamps, standard **Based on 9 watt lamps, standard*