

SXTEU Steel LED Exit Sign



Project:	
Type:	
Catalog #:	



STANDARD



OPTIONAL



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

DIMENSIONS

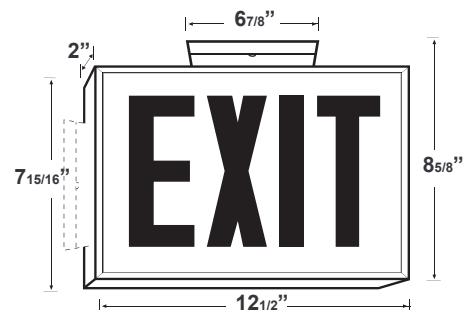

ORDERING INFORMATION

Sample Part Number: **SXTEU-2-R-W-EM**

Special voltage options available.
Check with your Best Lighting Representative.

Model	No. of faces	Letters	Housing	Battery	Options
SXTEU	1 Single Face	R Red	W White	Blank AC Only	SDT Self-diagnostics
USA	2 Universal Single/ Double Face	G Green	B Black	EM Battery Back-up	USA Assembled in

SXTEU Steel LED Exit Sign



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
SXTEU-RED/GREEN/EM/SDT	3.8	3.8	0.034	0.020