

# WLXTE Wet Location LED Exit Sign



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## STANDARD



## OPTIONAL



### ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Mounting hardware provided for back surface wall mount.

### HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- HTR: Optional internal heater for cold temperature applications.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (10°C – 40°C)

### DIMENSIONS

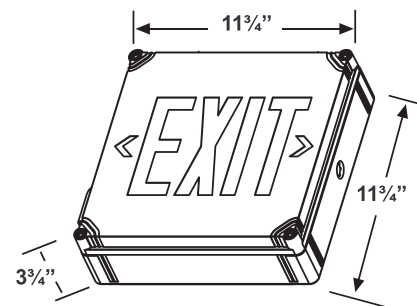

Sample Part Number: **WLXTE-1-R-EM**

### ORDERING INFORMATION

Special voltage options available.  
Check with your Best Lighting Representative.

Model	No. of faces	Letter Color	Battery	Options
WLXTE	1 Single Face	R Red G Green	Blank AC Only EM Battery Backup	HTR Internal Heater

# WLXTE Wet Location LED Exit Sign



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
WLXTE/EM	5.4	5.4	0.045	0.019