
ELXTEU

EDGELIT ALUMINUM EXIT SIGN





ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

Aluminum mounting canopy included for top, end or back mount.

HOUSING


- Premium-grade, extruded aluminum housing (also available in optional black or white powder-coated finishes).
- Self-adhesive Chevron appliques and guide template provided for directional indication.

OPTIONS

- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SPV: UL Listed for 208/220/240 Volt, 50/60Hz.
- Custom: Signs available with requested.'special' wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C − 50°C).
- Certified to CEC under Title 20 Regulations.

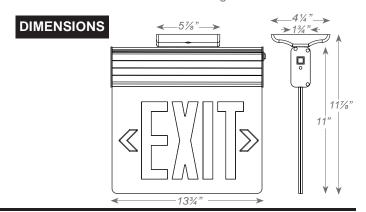

Sample Part Number: ELXTEU1RCAEM

ORDERING INFORMATION

MODEL	No. of FACES		LETTER COLOR		PANEL		HOUSING COLOR		BATTERY		OPTIONS	
ELXTEU 1 With single face only. 2 Available only with AC units. 3 Available only with EM units . 4 Not available with SDT.	1 2	Single Face Double Face	R G	Red Green	C M W	Clear ¹ Mirror White	W B A	White Black Aluminum	(blank) EM	AC-Only Battery Backup	2C-277 SDT USA SPV	Dual Circuit With 120V Input ² Dual Circuit With 277V Input ² Self-Diagnostics ³ Assembled In USA 208/220/240 Volt, 50/60Hz ⁴ Custom Wording