

# EZR XTEU Compact LED Exit Sign



Project:	
Type:	
Catalog #:	



## STANDARD



### ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


### HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (0°C – 50°C)

### DIMENSIONS

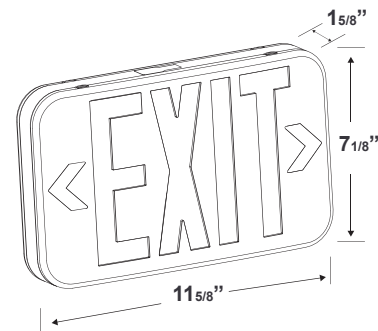

Sample Part Number: **EZR XTEU-1-R-W-EM**

### ORDERING INFORMATION

Model	No. of faces	Letter Color	Housing Color	Battery
EZR XTEU	1 Single Face	R Red	W White	Blank AC Only
	2 Universal Single/Double Face	G Green	B Black	EM Battery Backup

# EZRXTU Compact LED Exit Sign



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EZRXTU-RED/GREEN/EM	0.8	0.8	0.09	0.09